



WORLD-CLASS LABEL SOLUTIONS

SP-RM6 High Speed Labelling

The SPRM6 is the solution to single-lane labelling at a fixed high speed. The SP unit is a versatile system that can be positioned at multiple labelling points throughout the packhouse.

Applications

- Single-lane fruit on various types of conveying systems including graders/sizers, singulators, grader take-out belts, and grommeted elevators.

Throughput

- 150 to 550 fruit per minute per lane (fixed speed).

Features


- Bellows extend 55mm to accommodate variations in fruit size.
- Synchronized with grader or singulator for accurate label positioning across different fruit sizes.
- Fruit detection by electronic eye.
- Empty cassette warning light with beacon.
- Runs CP2.5 to CP6.0 size labels.

Optional

- Waste tape collection unit is available on banked systems.



Patents granted in the U.S. and other countries

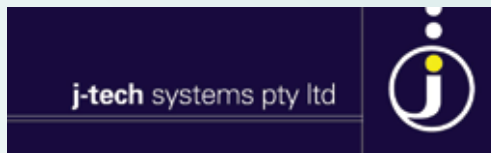

42c Conrad Place, Albury NSW 2641
Ph: 1300 301 784
www.jtechsystems.com.au

HLS01 OCT 09

