



WORLD-CLASS LABEL SOLUTIONS

TL3 Tray Labelling

The TL3 is a versatile, stand alone pattern labelling unit, easily capable of being moved from one labelling point to another. The TL3 can also be integrated into a packing line.

Applications

- Narrow-edge or wide-edge leading tray orientation up to 450mm.
- Single layer trays or liners.
- Ideal for re-packer options or where a packhouse has multiple labelling points.

Throughput


- 10 trays per minute, depending on tray pattern and infeed efficiency.

Features


- Pattern selection via easy-touch keypad with capability for storing up to 68 tray patterns.
- Height may be adjusted to allow for different tray depths.
- Bellows extend 55mm to accommodate variations in fruit size.
- System is portable, movable.
- Empty cassette warning light with beacon.
- Runs CP2.5 to CP5.0 size labels.

Optional

- Infeed and outfeed trays.
- Blocked exit scanner.
- Infeed and outfeed roller.
- Infeed gate.

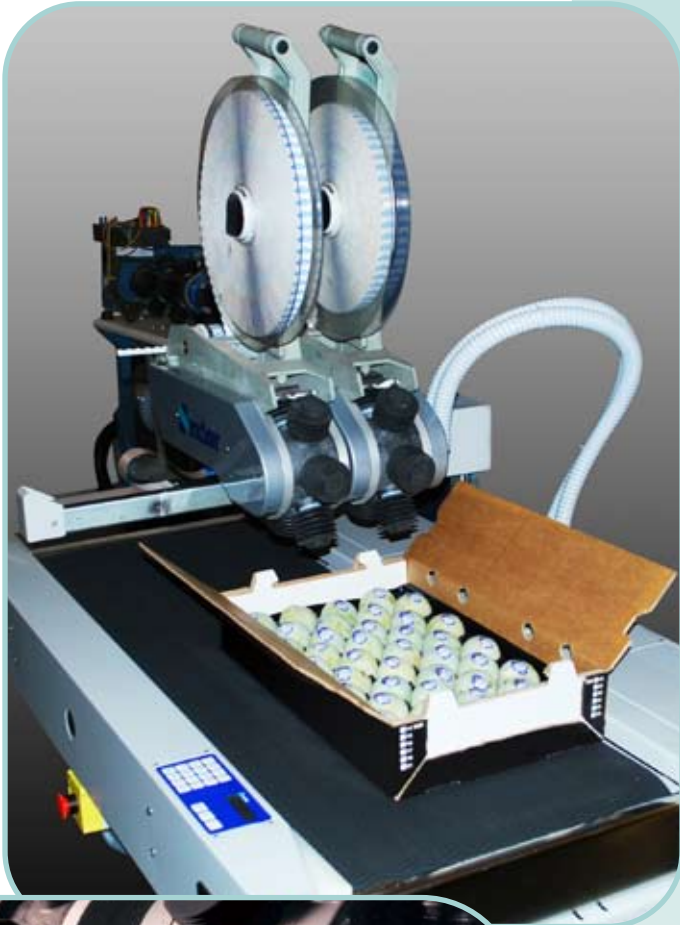

Patents granted in the U.S. and other countries

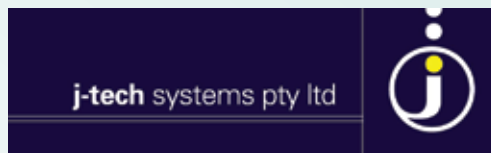

42c Conrad Place, Albury NSW 2641
Ph: 1300 301 784
www.jtechsystems.com.au

HLS01 OCT 09

